




ESPRIT

ESPRIT

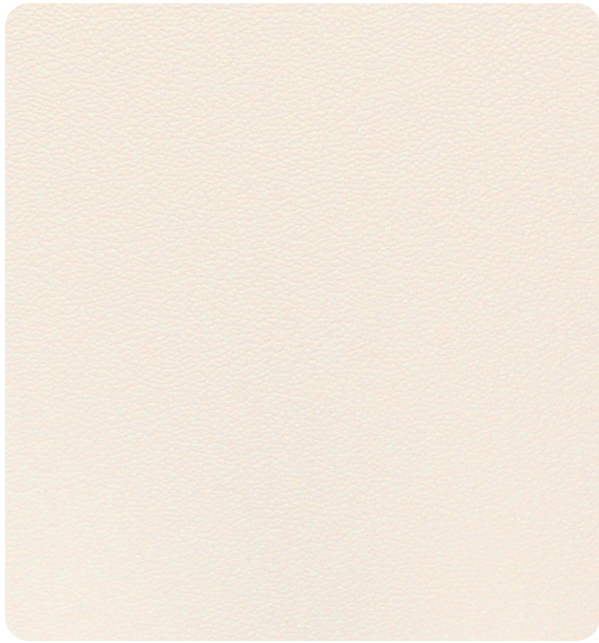


Super White




Snow White



Adobe White




Alabaster



Parchment



Green Tea



Taupe



Shell



Sand




Saddle Tan



Oak



Chestnut




Sun Yellow



Doe



Golden Rod




Tea Leaf



Black

ESPRIT



Flint Grey



Dove



Platinum



Gunmetal



Mocha



Artichoke



Olive Green



Irish Spring



Emerald



Yew Green



Dusty Jade




North Woods



Vizcaya Palm



Aqua Green



Celadon



Aegan



Forest

ESPRIT



Mandarin Orange



Tomato



American Beauty



Candy Apple



Claret



Peach



Rose




British Tan



Deep Clay



Paprika

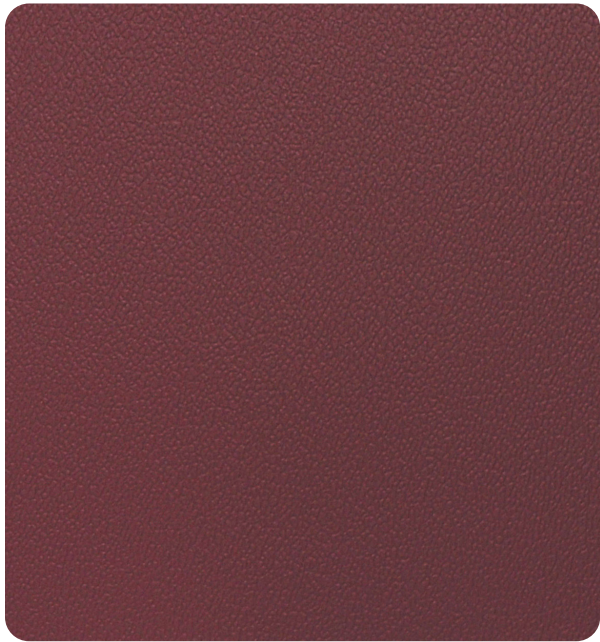

Wine Berry



Pink



Mauve



Blush



Tea Rose




Raspberry



Sangria

ESPRIT



Teal



Grotto



Aqua Dark



Ocean Grey



Blue Ridge



Colonial Blue



Regimental Blue



Blueberry



Royal



Imperial Blue



Space Blue



Marina



Graphite


ESPRIT




Iris




Dewberry



Espresso



Burgandy




Wood Violet



New Purple



Purple Iris



Concord



Grape



Plum

APPLICATIONS

Contract, Education, Healthcare, Hospitality, Residential Upholstery

GENERAL SPECIFICATIONS

Surface Composition	100% PVC
Backing Composition	100% Polyester
Weight	30 oz per linear yard
Width	54"
Thickness	0.97 mm

ADDED PERFORMANCE SPECIFICATIONS

Stain Resistance	Yes	
Colorfastness to Light	1,000 Hours	ASTM G154-16
Bleach Resistance	Yes, 10% Dilution	
Mildew Resistance	Pass	ASTM G21-13
Cold Crack	-20° F	CFFA-6a-2007
Sulfide Stain Resistance	Yes	

PHYSICAL PERFORMANCE SPECIFICATIONS

Abrasion Resistance	250,000+ Double Rubs	ASTM D4157-13
Breaking Strength	95 Warp, 73 Fill	ASTM D751-06
Crocking Resistance	5 Dry, 5 Wet	AATCC 8-2007
Flex Resistance	25,000+	ASTM D2097-03
Tear Strength: Tongue Tear	11.9 Warp, 15.4 Fill	ASTM D751-06
Seam Strength: Tack Tear	67 Warp, 43 Fil	ASTM D751-06

***Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan.**

FLAMMABILITY SPECIFICATIONS

California TB 117:13	Pass
UFAC Class I	Pass
NFPA 260	Pass

REDUCED ENVIRONMENTAL IMPACT

This product does not pose any exposure risks associated with chemicals in Prop 65

No added flame retardant chemicals - AB2998 compliant

No added anti-bacterial chemicals

7P Phthalate free

Lead / heavy metal free

BPA free / TRIS free / Formaldehyde free

Does not contain conflict minerals



Always order samples as screen and printed colors may not be an exact representative.

1 (800) 424-2477
garproducts.com
servce@garprducts.com

ESPRIT



CARE AND CLEANING

This pattern has an SW and BC cleaning code. Prompt cleaning is always recommended. Cleaning steps are listed by type of stain.

REGULAR CLEANING AND MAINTENANCE

Clean the soiled area with mild soap and water, then rinse with fresh water and wipe dry with a clean cloth.

FOOD STAINS & OILS

Wipe affected area with a soft cloth with appropriate pressure. If some stains persist, clean with mild soap and water. Rinse with fresh water and wipe dry. For stubborn stains, spot clean with a 70% dilution of isopropyl alcohol (rubbing alcohol) and water and wipe. Rinse with fresh water and wipe dry.

HEALTHCARE/DISINFECTION

Clean the soiled area with a 10% solution of household bleach and water. It is important to rinse the cleaned area with fresh water after applying the bleach solution.

DIFFICULT STAINS

Clean the soiled area with 70% solution of isopropyl alcohol and water. It is important to rinse the cleaned area with fresh water after applying the alcohol solution.



Always order samples as screen and printed colors may not be an exact representative.

1 (800) 424-2477
garproducts.com
service@garproducts.com